
LINHY®

Never stop to strive for bettre & better light.....

Zhongshan Linyi Technology Co,.Ltd
Plant No. 51, Xihuan 5th Road, Shatian Village,South district, Zhongshan city,Guangdong Province,China

Catalog

2025

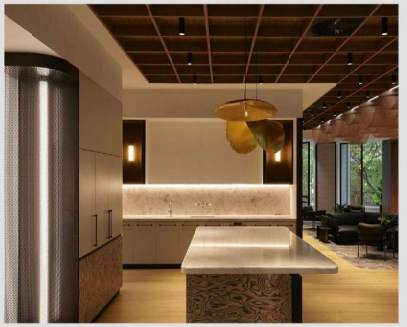

Commercial Lighting manufacturer













Ready for your adventure in commercial lighting field....

Microshine

- LED Packaging
- Outdoor Lights
- LED Strip Lights
- Drivers
- Commercial lights

One-stop purchase service

We are all under the leadership of Microshine Group ,we encompass an extensive spectrum of lighting categories, delivering end-to-end procurement solutions to streamline your supplier management costs.

TUV & CENUS witness laboratory

We operate a TUV-accredited lab, ensuring the products we deliver come with robust quality assurance

- VDA 6.3 test procedure
- Electrical Safety Testing(LVD)
- Photobiological Safety Testing
- Environmental Reliability Testing
- Mechanical and Structural Safety Testing
- Electromagnetic Compatibility Testing (EMC)







Quality-control production process with ISO9001

Our manufacturing processes are embedded with ISO9001-aligned protocols, weaving rigorous quality checks into every stage—from raw material sourcing to final assembly.
This systematic adherence ensures consistent compliance with global standards, translating to products that embody uncompromising reliability


- Dust-free production line
- 4 hours aging test for each products before packaging

DALI-2 Smart Lighting Control System

System Framework - Room-level Solution


Room - level lighting control typically involves no more than 64 luminaires. As one DALI loop supports up to 64 DALI luminaires, a single loop suffices

Zencontrol, a DALI - 2 - compatible system, integrates devices like control panels and sensors. Its flexible setup (via these components and software) meets room - level control needs.

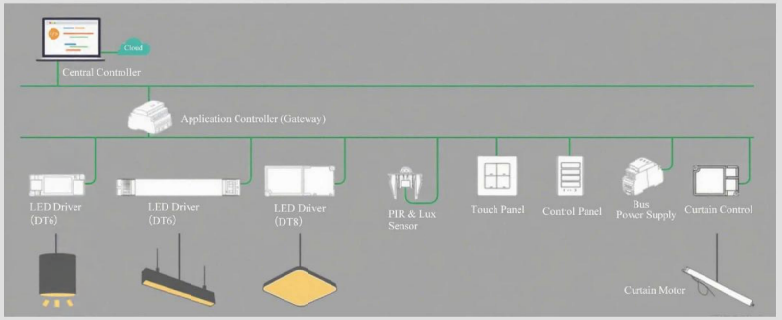

System Framework – Floor and Building Level

The DALI-2 system delivers floor-to-building lighting and curtain control solutions via cascaded DALI gateways. Each gateway has an Ethernet port, enabling gateway cascading and device integration through software. For example, a control panel on Gateway A can manage lights connected to Gateway B, or group lights from both Gateways A and B for unified control. the system can operate independently or connect to an encrypted cloud for configuration, control, and updates.

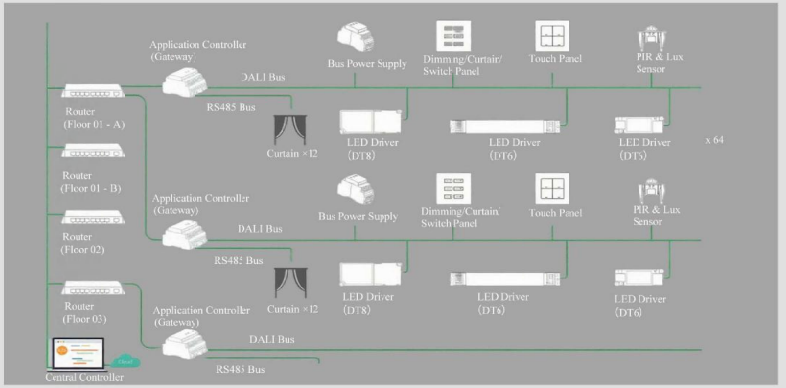

220-240v version

Downlight/Spotlight/Track light/Steplight

More info at catalog-Magnetic Track System 5mm/8mm/11mm/16mm/20mm

INDEX

01 Downlight P1~4

02 Spotlight P5~22

03 Track light P27~38

04 Steplight P40

Note: We can provide you customization service based on your needs

140Lm/W Project-use Downlight



For your options:

3 Years 30,000H
5 Years 50,000H

Non-dim 0-10V
TRAIC DALI

60°

Single CCT 2700K/3000K/4000K/5000K/6000K
CCT Changeable

LYC008

IP20 UGR<8 CRI>93 Flicker Free





▶ MATERIAL SPECIFICATIONS

Housing	Die-casting Aluminum Powder coated
Light Source	Bridgelux-high lumen version /OSRAM
Driver	Eaglerise-flicker free version /Boke
Power Cable	Female & Male connection-2*0.75mm^2
Operating Temperature	-20℃~40℃

▶ Detailed SPECIFICATIONS

Item No.	WATT	LM	Lumen Efficacy	CCT	UGR	CRI	PF	Beam Angle	Cut-out	Size
LYC008075R	12W	1332Lm	111Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	60°	Ø68-80mm	Ø89*45.5mm
LYC008095R	20W	2520Lm	126Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	60°	Ø90-100mm	Ø110*48.5mm
LYC008125R	30W	3990Lm	133Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.9	60°	Ø115-125mm	Ø140*52.5mm
LYC008145R	35W	4550Lm	130Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.9	60°	Ø140-150mm	Ø165*55.5mm
LYC008145R	40W	5360Lm	134Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.9	60°	Ø160-170mm	Ø185*57mm
LYC008145R	42W	5964Lm	142Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.9	60°	Ø200-210mm	Ø235*59.5mm

IP65 Deep anti-glare downlight



For your options:

3 Years 30,000H
5 Years 50,000H

Non-dim 0-10V
TRAIC DALI

15° / 24° /38°/ 50°

Honey comb

Single CCT 2700K/3000K/4000K/5000K/6000K
CCT Changeable

LYC009

UGR<8 CRI>93 Flicker Free





▶ MATERIAL SPECIFICATIONS

Housing	Die-casting Aluminum Powder coated
Light Source	Bridgelux-high lumen version
Driver	Eaglerise-flicker free version /Boke
Power Cable	Female & Male connection-2*0.75mm^2
Operating Temperature	-20℃~40℃

▶ Detailed SPECIFICATIONS

Item No.	WATT	LM	Lumen Efficacy	CCT	UGR	CRI	PF	Beam Angle	Cut-out	Size
LYC009075R	12W	780Lm	65Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/24°/38°/50°	Ø75mm	Ø85*54mm
LYC009095R	18W	1224Lm	68Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/24°/38°/50°	Ø95mm	Ø105*65mm
LYC009125R	25W	1800Lm	72Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.9	15°/24°/38°/50°	Ø115mm	Ø135*75mm
LYC009135R	35W	2730Lm	78Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.9	15°/24°/38°/50°	Ø135mm	Ø150*80mm

Deep anti-glare surface-mounted downlight



For your options:

3 Years 30,000H
5 Years 50,000H

Non-dim 0-10V
TRAIC DALI

24° /38°/ 55°

Single CCT 2700K/3000K/4000K/5000K/6000K
CCT Changeable

LYM001

IP20 UGR<8 CRI>93 Flicker Free





▶ MATERIAL SPECIFICATIONS

Housing	Cool-forged Aluminum Powder coated
Light Source	Bridgelux-high lumen version
Driver	Eaglerise-flicker free version /Boke
Power Cable	Female & Male connection-2*0.75mm^2
Operating Temperature	-20℃~40℃

▶ Detailed SPECIFICATIONS

Item No.	WATT	LM	Lumen Efficacy	CCT	UGR	CRI	PF	Beam Angle	Cut-out	Size
LYM001075R	12W	816Lm	68Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	24°/38°/55°	/	Ø75*83mm
LYM001096R	16W	1168Lm	73Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	24°/38°/55°	/	Ø96*95mm
LYM001118R	20W	1440Lm	72Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	24°/38°/55°	/	Ø118*110mm
LYM001147R	32W	2624Lm	82Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.9	24°/38°/55°	/	Ø147*130mm

Integrated die-casted Aluminum downlight



For your options:

3 Years 30,000H
5 Years 50,000H

Non-dim 0-10V
TRAIC DALI

15° / 24° /38°/ 50°

Single CCT 2700K/3000K/4000K/5000K/6000K
CCT Changeable

LYA004

IP20 UGR<8 CRI>93 Flicker Free





▶ MATERIAL SPECIFICATIONS

Housing	Die-casting Aluminum Powder coated
Light Source	Bridgelux-high lumen version
Driver	Eaglerise-flicker free version /Boke
Power Cable	Female & Male connection-2*0.75mm^2
Operating Temperature	-20℃~40℃

▶ Detailed SPECIFICATIONS

Item No.	WATT	LM	Lumen Efficacy	CCT	UGR	CRI	PF	Beam Angle	Cut-out	Size
LYA004075R	25W	1950Lm	78Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/24°/38°/50°	Ø75mm	Ø90*106mm
LYA004095R	36W	3060Lm	85Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/24°/38°/50°	Ø95mm	Ø105*115mm

Project-use elephant downlight



For your options:

3 Years 30,000H
5 Years 50,000H

Non-dim 0-10V
TRAIC DALI

15° / 24° /38°/ 50°

Single CCT 2700K/3000K/4000K/5000K/6000K
CCT Changeable

LYA005

UGR<10 CRI>93 Flicker Free



▶ MATERIAL SPECIFICATIONS

Housing	ADC12# Die-casting aluminum Powder coated
Light Source	Bridgelux-high lumen version
Driver	Eaglerise-flicker free version
Power Cable	Female & Male connection-2*0.75mm^2
Operating Temperature	-20℃~40℃

▶ Detailed SPECIFICATIONS

Item No.	WATT	LM	Lumen Efficacy	CCT	UGR	CRI	PF	Beam Angle	Cut-out	Size
LYA005075R	8W	544Lm	68lm/w	2700k/3000k 4000k/5000k	<10	>93	>0.5	15°/24°/38°/50°	Ø75mm	Ø85*67mm
LYA005100R	15W	1050Lm	70lm/W	2700k/3000k 4000k/5000k	<10	>93	>0.5	15°/24°/38°/50°	Ø100mm	Ø112*90mm
LYA005125R	25W	2150Lm	86lm/w	2700k/3000k 4000k/5000k	<10	>93	>0.9	15°/24°/38°/50°	Ø125mm	Ø140*120mm
LYA005145R	35W	3080Lm	88lm/w	2700k/3000k 4000k/5000k	<10	>93	>0.9	15°/24°/38°/50°	Ø145mm	Ø165*135mm

Adjustable Spotlight



For your options:

3 Years 30,000H
5 Years 50,000H

Non-dim 0-10V
TRAIC DALI

15° / 24° /38°/ 50°


Honey comb

Single CCT 2700K/3000K/4000K/5000K/6000K
CCT Changeable

LYA006

UGR<10 CRI>93 Flicker Free



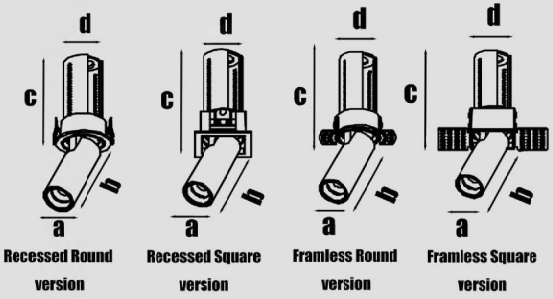

▶ MATERIAL SPECIFICATIONS

Housing	ADC12# Die-casting aluminum Powder coated
Light Source	Bridgelux-high lumen version
Driver	Eaglerise-flicker free version
Power Cable	Female & Male connection-2*0.75mm^2
Operating Temperature	-20℃~40℃

▶ Detailed SPECIFICATIONS

Item No.	WATT	LM	Lumen Efficacy	CCT	UGR	CRI	PF	Beam Angle	Cut-out	Size
LYA006045R	7W	525Lm	75lm/w	2700k/3000k 4000k/5000k	<10	>93	>0.5	15°/24°/38°/50°	Φ45mm	Φ30*75*85*Φ52mm
LYA006055R	10W	780Lm	78lm/W	2700k/3000k 4000k/5000k	<10	>93	>0.5	15°/24°/38°/50°	Φ55mm	Φ39*82*86*Φ62mm
LYA006075R	15W	1200Lm	80lm/w	2700k/3000k 4000k/5000k	<10	>93	>0.9	15°/24°/38°/50°	Φ75mm	Φ56*95*105*Φ95mm
LYA006095R	30W	2580Lm	86lm/w	2700k/3000k 4000k/5000k	<10	>93	>0.9	15°/24°/38°/50°	Φ95mm	Φ72*115*8127*Φ115mm

Deep anti-glare adjustable spotlight



For your options:

3 Years 30,000H
5 Years 50,000H

Non-dim 0-10V
TRAIC DALI


15° / 24° /38°/ 50°

Honey comb

Single CCT 2700K/3000K/4000K/5000K/6000K
CCT Changeable

LYA008

IP20 UGR<8 CRI>93 Flicker Free



▶ MATERIAL SPECIFICATIONS

Housing	Die-casting Aluminum Powder coated
Light Source	Bridgelux-high lumen version
Driver	Eaglerise-flicker free version /Boke
Power Cable	Female & Male connection-2*0.75mm^2
Operating Temperature	-20℃~40℃

▶ Detailed SPECIFICATIONS

Item No.	WATT	LM	Lumen Efficacy	CCT	UGR	CRI	PF	Beam Angle	Cut-out	Size
LYA008055R	10W	720Lm	72Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/24°/38°/50°	Φ55mm	Ø62*80mm
LYA008075R	18W	1350Lm	75Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/24°/38°/50°	Ø75mm	Ø84*100mm
LYA008095R	38W	3230Lm	85Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/24°/38°/50°	Ø95mm	Ø105*120mm

Deep anti-glare adjustable spotlight



For your options:

3 Years 30,000H
5 Years 50,000H

Non-dim 0-10V
TRAIC DALI

15° / 24° /38°/ 50°

Honey comb

Single CCT 2700K/3000K/4000K/5000K/6000K
CCT Changeable

LYA009

IP20 UGR<8 CRI>93 Flicker Free










▶ MATERIAL SPECIFICATIONS

Housing	Die-casting Aluminum Powder coated
Light Source	Bridgelux-high lumen version
Driver	Eaglerise-flicker free version /Boke
Power Cable	Female & Male connection-2*0.75mm^2
Operating Temperature	-20℃~40℃

▶ Detailed SPECIFICATIONS

Item No.	WATT	LM	Lumen Efficacy	CCT	UGR	CRI	PF	Beam Angle	Cut-out	Size
LYA009055R	10W	657Lm	72Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/24°/38°/50°	Φ55mm	Ø75*80mm
LYA009075R	18W	720Lm	75Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/24°/38°/50°	Ø75mm	Ø95*100mm
LYA009095R	35W	876Lm	85Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/24°/38°/50°	Ø95mm	Ø115*120mm

Deep anti-glare adjustable spotlight

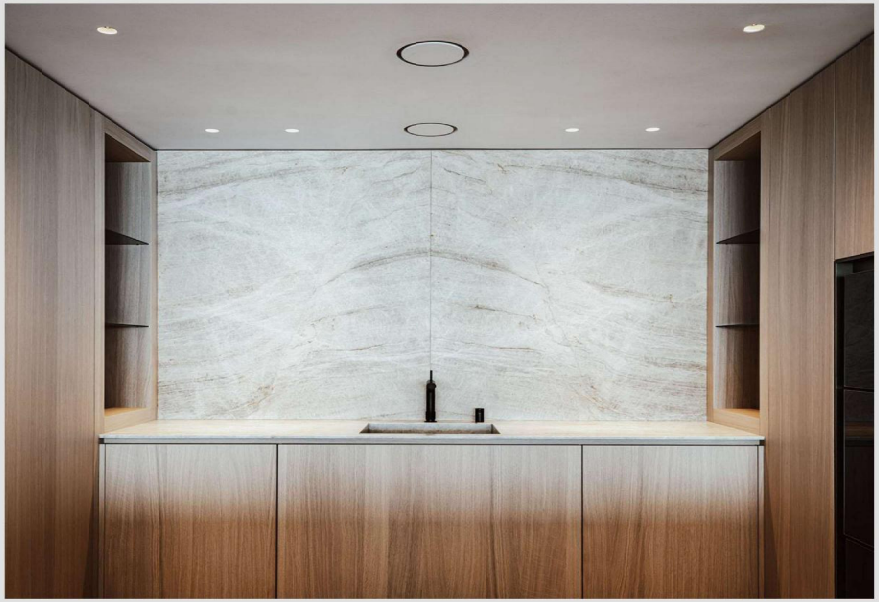

For your options:

3 Years 30,000H
5 Years 50,000H

Non-dim 0-10V
TRAIC DALI

15° / 24° /38°/ 50°

Honey comb

Single CCT 2700K/3000K/4000K/5000K/6000K
CCT Changeable

LYA006

IP20 UGR<8 CRI>93 Flicker Free





30°




▶ MATERIAL SPECIFICATIONS

Housing	Die-casting Aluminum Powder coated
Light Source	Bridgelux-high lumen version
Driver	Eaglerise-flicker free version /Boke
Power Cable	Female & Male connection-2*0.75mm^2
Operating Temperature	-20℃~40℃

▶ Detailed SPECIFICATIONS

Item No.	WATT	LM	Lumen Efficacy	CCT	UGR	CRI	PF	Beam Angle	Cut-out	Size
LYB006055R	9W	657Lm	73Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/24°/38°/50°	Φ55mm	Ø62*85mm
LYB006065R	10W	720Lm	72Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/24°/38°/50°	Φ65mm	Ø72*89mm
LYB006075R	12W	876Lm	73Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/24°/38°/50°	Φ75mm	Ø82*90mm
LYB006095R	25W	2000Lm	80Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.9	15°/24°/38°/50°	Φ95mm	Ø108*122mm

IP65 adjustable spotlight

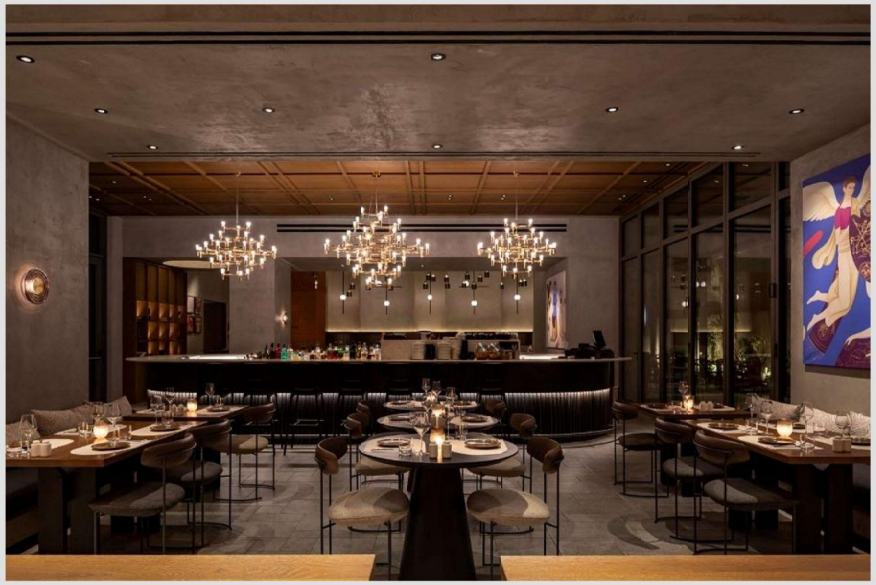

For your options:

3 Years 30,000H
5 Years 50,000H

Non-dim 0-10V
TRAIC DALI

15° / 24° /38°/ 50°

Honey comb

Single CCT 2700K/3000K/4000K/5000K/6000K
CCT Changeable

LYA007

UGR<8 CRI>93 Flicker Free





▶ MATERIAL SPECIFICATIONS

Housing	Die-casting Aluminum Powder coated
Light Source	Bridgelux-high lumen version
Driver	Eaglerise-flicker free version /Boke
Power Cable	Female & Male connection-2*0.75mm^2
Operating Temperature	-20℃~40℃

▶ Detailed SPECIFICATIONS

Item No.	WATT	LM	Lumen Efficacy	CCT	UGR	CRI	PF	Beam Angle	Cut-out	Size
LYB007055R	9W	657Lm	73Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/24°/38°/50°	Φ55mm	Ø62*85mm
LYB007065R	10W	720Lm	72Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/24°/38°/50°	Φ65mm	Ø72*89mm
LYB007075R	12W	876Lm	73Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/24°/38°/50°	Φ75mm	Ø82*90mm
LYB007095R	25W	2000Lm	80Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.9	15°/24°/38°/50°	Φ95mm	Ø108*122mm

Polarized Wall washer



For your options:

3 Years 30,000H
5 Years 50,000H


Non-dim 0-10V
TRAIC DALI

Single CCT 2700K/3000K/4000K/5000K/6000K
CCT Changeable

LYB008

IP20 UGR<8 CRI>93 Flicker Free





Polarized Wall washer

▶ MATERIAL SPECIFICATIONS

Housing	Die-casting Aluminum Powder coated
Light Source	Bridgelux-high lumen version
Driver	Eaglerise-flicker free version /Boke
Power Cable	Female & Male connection-2*0.75mm^2
Operating Temperature	-20℃~40℃

▶ Detailed SPECIFICATIONS

Item No.	WATT	CCT	UGR	CRI	PF	Cut-out	Size
LYB008055R	9W	2700k/3000k 4000k/5000k	<8	>93	>0.6	Φ55mm	Ø62*78mm
LYB008075R	10W	2700k/3000k 4000k/5000k	<8	>93	>0.6	Φ75mm	Ø82*91mm
LYB008095R	24W	2700k/3000k 4000k/5000k	<8	>93	>0.9	Φ95mm	Ø108*103mm

Mini Grille downlight



For your options:

3 Years 30,000H
5 Years 50,000H


Non-dim 0-10V
TRAIC DALI

15° /30°/ 40°

Single CCT 2700K/3000K/4000K/5000K/6000K
CCT Changeable

LYD001025

IP20 UGR<8 CRI>93 Flicker Free

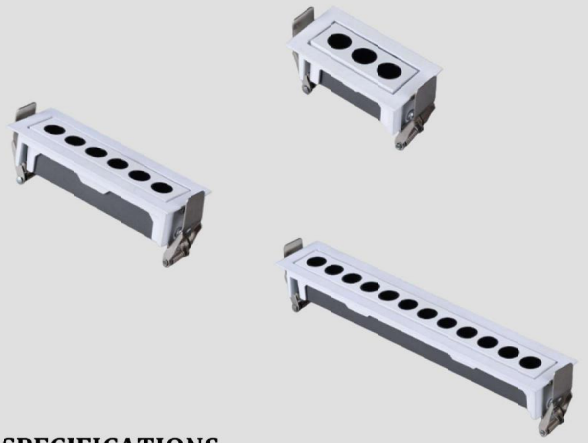


MATERIAL SPECIFICATIONS

Housing	Die-casting Aluminum Powder coated
Light Source	Bridgelux-high lumen version
Driver	Eaglerise-flicker free version /Boke
Power Cable	Female & Male connection-2*0.75mm^2
Operating Temperature	-20℃~40℃

Detailed SPECIFICATIONS

Item No.	WATT	LM	Lumen Efficacy	CCT	UGR	CRI	PF	Beam Angle	Cut-out	Size
LYD001025-03T	5W	720Lm	46Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/30°/40°	68*25mm	73*32*H47.5mm
LYD001025-06T	9W	1350Lm	48Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/30°/40°	128*25mm	133*32*H47.5mm
LYD001025-12T	18W	3230Lm	48Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/30°/40°	248*25mm	253*32*H47.5mm

Grille Spotlight

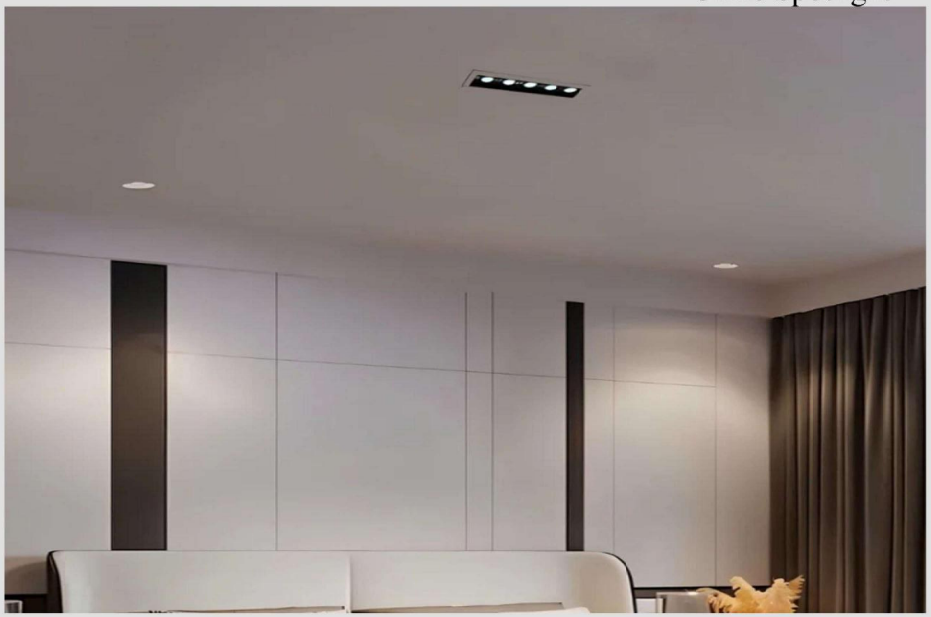

For your options:

3 Years 30,000H
5 Years 50,000H

Non-dim 0-10V
TRAIC DALI

15° / 30°/ 50°

Single CCT 2700K/3000K/4000K/5000K/6000K
CCT Changeable

LYD001037

IP20 UGR<8 CRI>93 Flicker Free




▶ MATERIAL SPECIFICATIONS

Housing	Die-casting Aluminum Powder coated
Light Source	Bridgelux-high lumen version
Driver	Eaglerise-flicker free version /Boke
Power Cable	Female & Male connection-2*0.75mm^2
Operating Temperature	-20℃~40℃

▶ Detailed SPECIFICATIONS

Item No.	WATT	LM	Lumen Efficacy	CCT	UGR	CRI	PF	Beam Angle	Cut-out	Size
LYD001037-01T	3W	150Lm	50Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/30°/50°	37*37mm	45*45*H50mm
LYD001037-02T	6W	312Lm	52Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.6	15°/30°/50°	67*37mm	75*25*H50mm
LYD001037-03T	9W	468Lm	52Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.9	15°/30°/50°	86*35mm	94*45*40mm
LYD001037-5T	12W	600Lm	50Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.9	15°/30°/50°	139*37mm	147*45*H50mm
LYD001037-10T	22W	1144Lm	52Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.9	15°/30°/50°	272*37mm	279*45*H50mm
LYD001037-15T	32W	1664Lm	58Lm/W	2700k/3000k 4000k/5000k	<8	>93	>0.9	15°/30°/50°	403*37mm	411*45*H50mm

Cool-forged Aluminum track light

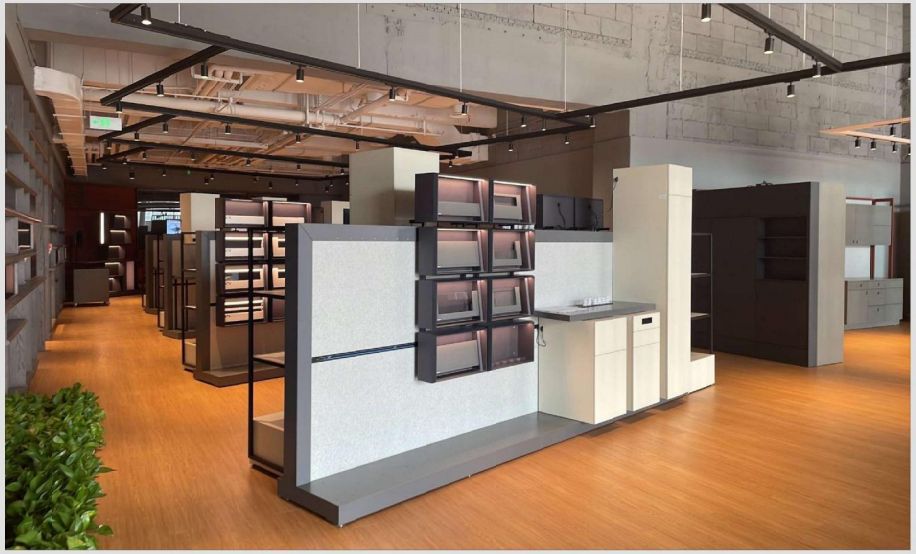

For your options:

3 Years 30,000H
5 Years 50,000H

Non-dim 0-10V
TRAIC DALI

15° / 24° /38°/ 50°

Honey comb

Single CCT 2700K/3000K/4000K/5000K/6000K
CCT Changeable

LYG001

UGR<10 CRI>93 Flicker Free




▶ MATERIAL SPECIFICATIONS

Housing	COOL-Forged Aluminum Powder coated
Light Source	Bridgelux-high lumen version
Driver	Global Adaptor
Power Cable	Female & Male connection-2*0.75mm^2
Operating Temperature	-20℃~40℃

▶ Detailed SPECIFICATIONS

Item No.	WATT	LM	Lumen Efficacy	CCT	UGR	CRI	PF	Beam Angle	Adaptor	Size
LYG001035R	7W	462Lm	66lm/w	2700k/3000k 4000k/5000k	<10	>93	>0.9	15°/24°/38°/50°	2/3/4 Wires	35*80mm
LYG001045R	10W	680Lm	68lm/W	2700k/3000k 4000k/5000k	<10	>93	>0.9	15°/24°/38°/50°	2/3/4 Wires	45*100mm
LYG001055R	15W	1080Lm	72lm/w	2700k/3000k 4000k/5000k	<10	>93	>0.9	15°/24°/38°/50°	2/3/4 Wires	55*120mm
LYG001065R	24W	1872Lm	78lm/w	2700k/3000k 4000k/5000k	<10	>93	>0.9	15°/24°/38°/50°	2/3/4 Wires	68*160mm

Cool-forged Aluminum track light

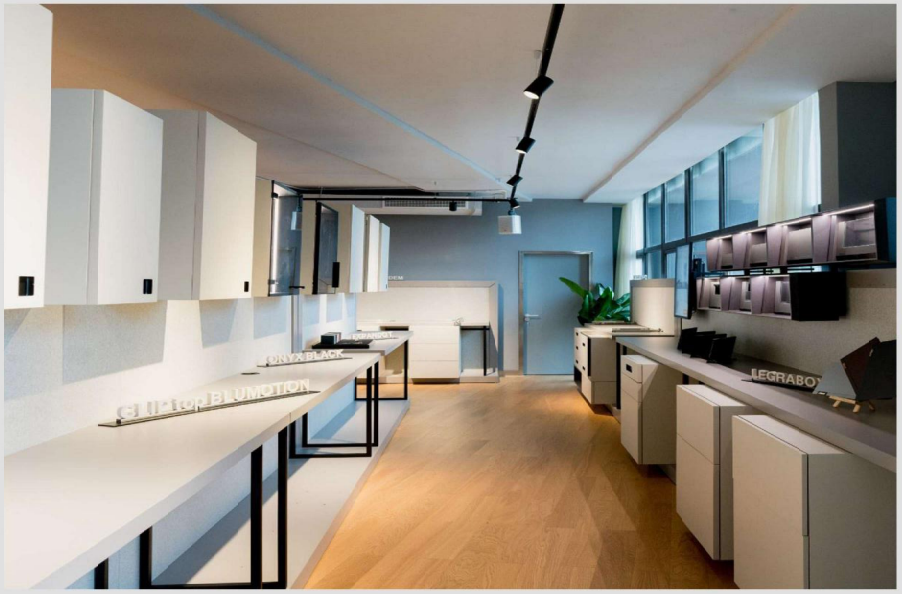

For your options:

3 Years 30,000H
5 Years 50,000H

Non-dim 0-10V
TRAIC DALI

15° / 24° /38°/ 50°

Honey comb

Single CCT 2700K/3000K/4000K/5000K/6000K
CCT Changeable

LYG002

UGR<10 CRI>93 Flicker Free



▶ MATERIAL SPECIFICATIONS

Housing	COOL-Forged Aluminum Powder coated
Light Source	Bridgelux-high lumen version
Driver	Eaglerise-flicker free version /Global Adaptor
Power Cable	Female & Male connection-2*0.75mm^2
Operating Temperature	-20℃~40℃

▶ Detailed SPECIFICATIONS

Item No.	WATT	LM	Lumen Efficacy	CCT	UGR	CRI	PF	Beam Angle	Adaptor	Size
LYG002068R	25W	1950Lm	78lm/w	2700k/3000k 4000k/5000k	<10	>93	>0.9	15°/24°/38°/50°	2/3/4 Wires	68*160mm
LYG002070R	30W	2340Lm	78lm/W	2700k/3000k 4000k/5000k	<10	>93	>0.9	15°/24°/38°/50°	2/3/4 Wires	70*146mm
LYG002080R	35W	2975Lm	85lm/w	2700k/3000k 4000k/5000k	<10	>93	>0.9	15°/24°/38°/50°	2/3/4 Wires	80*160mm
LYG002090R	42W	3696Lm	88lm/w	2700k/3000k 4000k/5000k	<10	>93	>0.9	15°/24°/38°/50°	2/3/4 Wires	90*170mm

Adjustable Zoom Track Light



For your options:

3 Years 30,000H
5 Years 50,000H

Non-dim 0-10V
TRAIC DALI

15° ~55°

Honey comb

Single CCT 2700K/3000K/4000K/5000K/6000K
CCT Changeable

LYG003

UGR<10 CRI>93 Flicker Free



▶ MATERIAL SPECIFICATIONS

Housing	Die-casting Aluminum Powder coated
Light Source	Bridgelux-high lumen version
Driver	Global Adaptor
Power Cable	Female & Male connection-2*0.75mm^2
Operating Temperature	-20℃~40℃

▶ Detailed SPECIFICATIONS

Item No.	WATT	LM	Lumen Efficacy	CCT	UGR	CRI	PF	Beam Angle	Adaptor	Size
LYG003055R	15W	1020Lm	68lm/w	2700k/3000k 4000k/5000k	<10	>93	>0.5	15°~55°	2/3/4 Wires	55*80mm



For your options:

3 Years 30,000H

5 Years 50,000H

Single CCT 2700K/3000K/4000K/5000K/6000K

CCT Changeable

CUT LIGHT

UGR<10 CRI>93 Flicker Free



LYQ001055R



LYQ002055R



LYQ003074R



LYQ004090R


▶ MATERIAL SPECIFICATIONS

Housing	COOL-Forged Aluminum Powder coated
Light Source	Bridgelux-high lumen version
Driver	Eaglerise-flicker free version
Power Cable	Female & Male connection-2*0.75mm^2
Operating Temperature	-20℃~40℃

▶ Detailed SPECIFICATIONS

Item No.	WATT	LM	Lumen Efficacy	CCT	UGR	CRI	PF	Beam Angle	Adaptor	Size
LYQ001055R	15W	/	/	2700k/3000k 4000k/5000k	<10	>93	>0.9	/	2/3/4 Wires	55*160mm
LYQ002055R	20W	/	/	2700k/3000k 4000k/5000k	<10	>93	>0.9	/	2/3/4 Wires	55*195mm
LYQ003074R	24W	/	/	2700k/3000k 4000k/5000k	<10	>93	>0.9	/	2/3/4 Wires	74*227mm
LYQ004090R	32W	/	/	2700k/3000k 4000k/5000k	<10	>93	>0.9	/	2/3/4 Wires	90*264mm

Adjustable Zoom track light

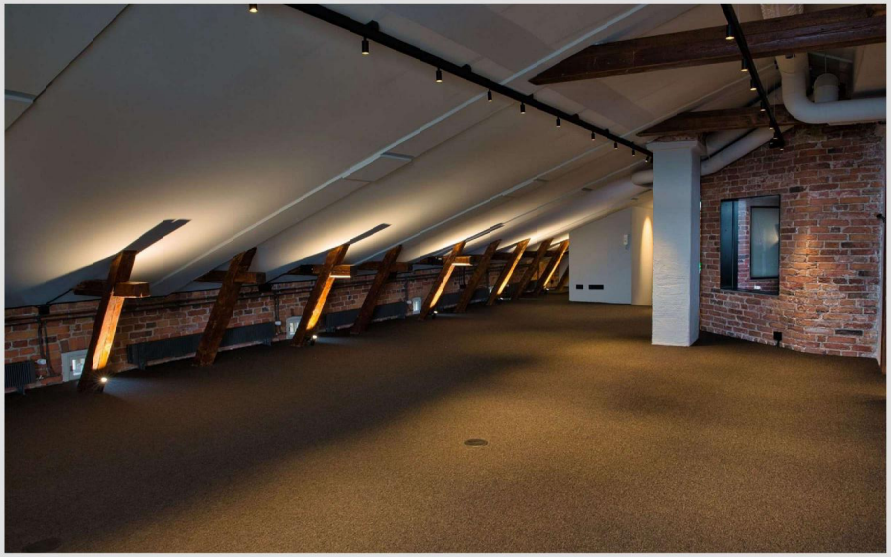

For your options:

3 Years 30,000H
5 Years 50,000H

Non-dim 0-10V
TRAIC DALI

10° ~50°

Honey comb

Single CCT 2700K/3000K/4000K/5000K/6000K
CCT Changeable

LYTJ001

UGR<10 CRI>93 Flicker Free



▶ MATERIAL SPECIFICATIONS

Housing	Cool-forged Aluminum Powder coated
Light Source	TOYONIA
Driver	Global Adaptor
Power Cable	Female & Male connection-2*0.75mm^2
Operating Temperature	-20℃~40℃

▶ Detailed SPECIFICATIONS

Item No.	WATT	LM	Lumen Efficacy	CCT	UGR	CRI	PF	Beam Angle	Adaptor	Size
LYTJ001065R	20W	1360Lm	68lm/w	2700k/3000k 4000k/5000k	<10	>93	>0.5	10°~50°	2/3/4 Wires	56*140mm
LYTJ001065R	30W	2040Lm	68lm/w	2700k/3000k 4000k/5000k	<10	>93	>0.5	10°~50°	2/3/4 Wires	75*160mm

Adjustable Zoom Track Light



For your options:

3 Years 30,000H
5 Years 50,000H

Non-dim 0-10V
TRAIC DALI

10° ~50°

Honey comb

Single CCT 2700K/3000K/4000K/5000K/6000K
CCT Changeable

LYTJ002

IP20 UGR<10 CRI>93 Flicker Free



▶ MATERIAL SPECIFICATIONS

Housing	COOL-Forged Aluminum Powder coated
Light Source	Bridgelux-high lumen version
Driver	Eaglerise-flicker free version
Power Cable	Female & Male connection-2*0.75mm^2
Operating Temperature	-20℃~40℃

▶ Detailed SPECIFICATIONS

Item No.	WATT	LM	Lumen Efficacy	CCT	UGR	CRI	PF	Beam Angle	Adaptor	Size
LYTJ002055R	15W	975Lm	65lm/w	2700k/3000k 4000k/5000k	<10	>93	>0.5	10°~50°	2/3/4 Wires	55*140mm
LYTJ002065R	20W	1300Lm	65lm/W	2700k/3000k 4000k/5000k	<10	>93	>0.9	10°~50°	2/3/4 Wires	65*147mm
LYTJ002075R	30W	2040Lm	68lm/w	2700k/3000k 4000k/5000k	<10	>93	>0.9	10°~50°	2/3/4 Wires	75*159mm
LYTJ002085R	35W	2380Lm	68lm/w	2700k/3000k 4000k/5000k	<10	>93	>0.9	10°~50°	2/3/4 Wires	85*165mm

STEP LIGHT





LY-CNL01

Power: 1-3W
Voltage: 220-240V
CCT: 2700K/3000K/4000K/5000K
Size: 40*105*50mm
Cut-out: 33*87*46mm



LY-CNL02



Power: 1-3W
Voltage: 220-240V
CCT: 2700K/3000K/4000K/5000K
Size: 86*86*30mm
Cut-out: 80*80*50mm





LY-CNL03

Power: 1-3W
Voltage: 220-240V
CCT: 2700K/3000K/4000K/5000K
Size: 86*86*30mm
Cut-out: 80*80*50mm